

Rec'd PCT/PTO 25 JAN 2005

PCT/IB 03 / 03 129

11.07.03 #2



Europäisches
Patentamt

European
Patent Office

Office européen
des brevets

REC'D 08 AUG 2003

WIPO

PCT

10/522285

Bescheinigung

Certificate

Attestation

Die angehefteten Unterla-
gen stimmen mit der
ursprünglich eingereichten
Fassung der auf dem näch-
sten Blatt bezeichneten
europäischen Patentanmel-
dung überein.

The attached documents
are exact copies of the
European patent application
described on the following
page, as originally filed.

Les documents fixés à
cette attestation sont
conformes à la version
initialement déposée de
la demande de brevet
européen spécifiée à la
page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

02078111.8

PRIORITY DOCUMENT
SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH
RULE 17.1(a) OR (b)

Der Präsident des Europäischen Patentamts;
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets
p.o.

R C van Dijk

BEST AVAILABLE COPY



Anmeldung Nr:
Application no.: 02078111.8
Demande no:

Anmeldetag:
Date of filing: 29.07.02
Date de dépôt:

Anmelder/Applicant(s)/Demandeur(s):

Koninklijke Philips Electronics N.V.
Groenewoudseweg 1
5621 BA Eindhoven
PAYS-BAS

Bezeichnung der Erfindung/Title of the invention/Titre de l'invention:
(Falls die Bezeichnung der Erfindung nicht angegeben ist, siehe Beschreibung.
If no title is shown please refer to the description.
Si aucun titre n'est indiqué se referer à la description.)

Low-pressure mercury vapor discharge lamp

In Anspruch genommene Priorität(en) / Priority(ies) claimed / Priorité(s)
revendiquée(s)

Staat/Tag/Aktenzeichen/State/Date/File no./Pays/Date/Numéro de dépôt:

Internationale Patentklassifikation/International Patent Classification/
Classification internationale des brevets:

H01J61/00

Am Anmeldetag benannte Vertragsstaaten/Contracting states designated at date of
filing/Etats contractants désignées lors du dépôt:

AT BE BG CH CY CZ DE DK EE ES FI FR GB GR IE IT LI LU MC NL PT SE SK TR

Low-pressure mercury vapor discharge lamp

EPO - DG 1

29.07.2002

(43)

The invention relates to a low-pressure mercury vapor discharge lamp comprising a discharge vessel,

the discharge vessel enclosing, in a gastight manner, a discharge space provided with a filling of mercury and a rare gas,

5 the discharge vessel comprising means for maintaining an electric discharge in the discharge space,

a portion of the surface of the discharge vessel facing the discharge space being provided with a protective layer.

In mercury vapor discharge lamps, mercury constitutes the primary component
10 for the (efficient) generation of ultraviolet (UV) light. A luminescent layer comprising a luminescent material (for example, a fluorescent powder) may be present on an inner wall of the discharge vessel to convert UV to other wavelengths, for example, to UV-B and UV-A for tanning purposes (sun panel lamps) or to visible radiation for general illumination purposes. Such discharge lamps are therefore also referred to as fluorescent lamps.

15 Alternatively, the ultraviolet light generated may be used for manufacturing germicidal lamps (UV-C). The discharge vessel of low-pressure mercury vapor discharge lamps is usually circular and comprises both elongate and compact embodiments. Generally, the tubular discharge vessel of compact fluorescent lamps comprises a collection of relatively short straight parts having a relatively small diameter, which straight parts are connected together
20 by means of bridge parts or via bent parts. Compact fluorescent lamps are usually provided with an (integrated) lamp cap. Normally, the means for maintaining a discharge in the discharge space are electrodes arranged in the discharge space. In an alternative embodiment the low-pressure mercury vapor discharge lamp comprises a so-called electrodeless low-pressure mercury vapor discharge lamp.

25 It is known that measures are taken in low-pressure mercury vapor discharge lamps to inhibit blackening of parts of the inner wall of the discharge vessel, which parts are in contact with the discharge which, during operation of the discharge lamp, is present in the discharge space. Such a blackening, which is established by interaction of mercury and glass, is undesirable and does not only give rise to a lower light output but also gives the lamp an

unaesthetic appearance, particularly because the blackening occurs irregularly, for example, in the form of dark stains or dots. By using a protective layer as mentioned in the opening paragraph, blackening and discoloration of the inner wall of the discharge vessel is reduced.

5

A low-pressure mercury vapor discharge lamp of the type described in the opening paragraph is known from US 4 544 997. In the known discharge lamp, yttrium oxide is provided as a protective layer on the inner wall of the discharge vessel.

10 A drawback of the use of the known low-pressure mercury vapor discharge lamp is that the consumption of mercury is still relatively high. As a result, a relatively large amount of mercury is necessary for the known lamp so as to realize a sufficiently long lifetime. In the case of injudicious processing after the end of the lifetime, this is detrimental to the environment.

15

It is an object of the invention to provide a low-pressure mercury vapor discharge lamp of the type described in the opening paragraph, consuming a relatively small amount of mercury. To this end, the low-pressure mercury vapor discharge lamp according to the invention is characterized in that the protective layer comprises aluminum oxide or
20 yttrium oxide and further comprises a borate and/or a phosphate of an alkaline earth metal and/or of scandium, yttrium or a further rare earth metal.

Protective layers comprising a combination of a layer comprising yttrium oxide or aluminum oxide and the metal borates and/or phosphates in accordance with the inventive measure, appear to be very well resistant to the effect of the mercury-rare gas
25 atmosphere which, in operation, prevails in the discharge vessel of a low-pressure mercury vapor discharge lamp. It has surprisingly been found that the mercury consumption of low-pressure mercury vapor discharge lamps provided with a protective layer according to the invention is considerably lower than with the known protective layer of the known low-pressure mercury vapor discharge lamps. By way of example, low-pressure mercury vapor
30 discharge lamps provided with a protective layer according to the invention were compared with known low-pressure mercury vapor discharge lamps provided with a known protective layer. After several thousand operating hours, an at least substantially twice smaller mercury content was found in protective layers according to the invention as compared with the
known protective layers.

Not wishing to be held to any particular theory, the inventors believe that the addition of borates and/or phosphates of alkaline earth metals and/or of scandium, yttrium or further rare earth metals the number of so-called active sites in the known protective layer of yttrium oxide or aluminum oxide are reduced. As a consequence, the diffusion of Na-ions from the glass is reduced and the affinity (chemical attraction) of mercury and the protective layer according to the invention is reduced.

The protective layers in the low-pressure mercury vapor discharge lamp according to the invention further satisfy the requirements of light and radiation transmissivity and can be easily provided as very thin, closed and homogeneous protective layers on an inner wall of a discharge vessel of a low-pressure mercury vapor discharge lamp. This is effected, for example, by rinsing the discharge vessel with a solution of a mixture of suitable metal-organic compounds (for example, acetonates or acetates, for example, scandium acetate, yttrium acetate, lanthanum acetate or gadolinium acetate mixed with calcium acetate, strontium acetate or barium acetate) or of boric acid or of phosphoric acid diluted in water, while the desired protective layer is obtained after drying and sintering.

An additional advantage of the use in low-pressure mercury vapor discharge lamps of a protective layer according to the invention is that such protective layers have a relatively high reflectivity in the wavelength range around 254 nm (in the discharge vessel, mercury generates, inter alia, resonance radiation at a wavelength of 254 nm). Given the refractive index of the protective layer, which is relatively high with respect to the refractive index of the inner wall of the discharge vessel, such a layer thickness is preferably chosen that the reflectivity at said wavelength is maximal. By using such protective layers, the initial light output of low-pressure mercury vapor discharge lamps is increased.

In a preferred embodiment of the low-pressure mercury vapor discharge lamp according to the invention, the protective layer comprises a borate and/or a phosphate of calcium, strontium and/or barium. Such a protective layer has a relatively high coefficient of transmission for visible light. Moreover, low-pressure mercury vapor discharge lamps with a protective layer comprising yttrium oxide or aluminum oxide and additionally comprising calcium borate, strontium borate or barium borate or calcium phosphate, strontium phosphate or barium phosphate have a good maintenance.

In a further preferred embodiment of the low-pressure mercury vapor discharge lamp according to the invention, the protective layer comprises a borate and/or a phosphate of lanthanum, cerium and/or gadolinium. Such a protective layer has a relatively high coefficient of transmission for ultraviolet radiation and visible light. It has further been

found that a protective layer comprising lanthanum borate or gadolinium borate or comprising cerium phosphate or gadolinium phosphate has a good adhesion with the inner wall of the discharge vessel. Moreover, the protective layer can be provided in a relatively simple manner (for example, with lanthanum acetate, cerium acetate or gadolinium acetate mixed with boric acid or diluted phosphoric acid), which has a cost-saving effect, notably in a mass manufacturing process for low-pressure mercury vapor discharge lamps.

An additional advantage of the use in low-pressure mercury vapor discharge lamps of a protective layer comprising yttrium oxide or aluminum oxide and additionally a borate and/or a phosphate of scandium, yttrium, lanthanum, cerium and/or gadolinium is that such protective layers have a relatively high reflectivity in the wavelength range around 254 nm. By using said high-refractive protective layers and by optimizing the layer thickness of such protective layers, a low-pressure mercury vapor discharge lamp having an increased initial light output is obtained. Such protective layers may be used to particular advantage in, for example, low-pressure mercury vapor discharge lamps for radiation purposes (referred to as germicidal lamps).

A preferred embodiment of the low-pressure mercury vapor discharge lamp according to the invention is characterized in that the aluminum oxide comprises particles with an effective particle size d_p not exceeding 3 μm , preferably in the range $0.1 \leq d_p \leq 0.8 \mu\text{m}$. In practice, the larger sized aluminum oxide particles are derived from Baikowsky CR6 aluminum oxide powder and the smaller aluminum oxide particles are derived from Alon-C manufactured by Degussa.

In practical embodiments of the low-pressure mercury vapor discharge lamp, the protective layer comprises an alkaline earth borate and the layer thickness is in the range from 0.1–50 μm . By employing an aluminum oxide protective layer in combination with an alkaline earth borate and with a thickness in the range given above appears to be very well resistant to the action of the mercury-rare gas atmosphere in the discharge vessel. The inventors have had the insight that by using a suspension of “nano-particles” of alkaline earth borates, in particular calcium, strontium and/or barium borate, a protective layer can be made with a thickness which can be significantly larger than that of the protective layer made out of a solution of the salts in the known discharge lamp. With “nano-particles” in the description of the present invention it is meant that particles with a particle size in the range from 0.1–1 μm . The softening point of the calcium, strontium and/or barium borate particulate material is low enough that the particles melt together during the bending glass shaping. In addition, a dense protective layer is obtained that, because of its large thickness,

has not completely reacted with the underlying wall of the discharge vessel in the bents and in the seal. In experiments it was found that a protective layer made from nano-particles of calcium, strontium and/or barium borate showed a relatively high point of zero charge and a relatively low mercury consumption. An additional advantage of producing the protective layer from nano-particles of alkaline earth borates is that the size of the particles of alkaline earth borates is comparable to the wavelength of the UV light. This makes it possible to employ the protective layer also as a reflector for UV light (the size of the particles is in the range from approximately 0.3 μm to approximately 0.6 μm). Preferably, the protective layer comprises SrB_4O_7 . Preferably, nano-particles of SrB_4O_7 with a particle size in the range from approximately 0.1 to approximately 1 μm are used to manufacture the protective layer according to the invention.

Preferably, the thickness of the protective layer is in the range from 1–20 μm . Upon making the protective layer thinner than approximately 10 μm could, in particular during bending glass shaping of discharge vessels under factory conditions, give rise to a possible complete reaction of the particulate calcium, strontium and/or barium borate with the wall. The risk is higher in a production environment where the conditions can not always be met as precisely as in laboratory experiments. It is observed that in the straight parts of the discharge vessel of compact fluorescent lamps, the particles in the protective layer do not reach a high enough temperature to melt leading to diffuse scattering of light in the protective layer. In the arc-shaped parts of the discharge vessel of compact fluorescent lamps, the particles in the protective layer reach a high enough temperature to melt leading to a transparent protective layer.

A preferred embodiment of the low-pressure mercury vapor discharge lamp according to the invention is characterized in that the discharge vessel comprises at least one stem, the stem being provided with the protective layer. Coating the stems of a discharge vessel with the protective layer provides additional protection from sodium diffusion out of the stem glass. In this embodiment the means for maintaining the discharge are electrodes which are supported by conducting lead wires extending through a glass pinch provided on the stem.

A preferred embodiment of the low-pressure mercury vapor discharge lamp according to the invention is characterized in that the discharge vessel is made from a glass comprising silicon dioxide and sodium oxide, with the glass composition comprising the following essential constituents, given in percentages by weight (wt.%): 60-80 wt.% SiO_2 and 10-20 wt.% Na_2O . The application of a protective layer according to the invention in

combination with the sodium-rich glass in accordance with the invention causes blackening to be substantially reduced in the discharge vessel. The invention is in particular embodied in a combination of a discharge vessel with a coating comprising the borate and/or phosphate as described above and the sodium-rich glass.

5 Sodium-rich glasses are comparatively inexpensive. In the known discharge lamp use is made of a so-called mixed alkali glass having a comparatively small SiO_2 content (approximately 67% as compared to approximately 72% for the sodium-rich glass) and comprising, inter alia, approximately 8 wt.% Na_2O and 5 wt.% K_2O . The cost price of such a glass is comparatively high. A comparison between the composition of the known glass and
10 the sodium-rich glass shows that the alkali content is different. The sodium-rich glass has a comparatively low potassium content, while the known glass is a so-called mixed alkali glass having an approximately equal molar ratio of Na_2O and K_2O . An advantage resides in that the mobility of the alkali ions in the sodium-rich glass is comparatively high with respect to the mobility in the mixed alkali glass. The so-called run-up time for low-pressure mercury
15 vapor discharge lamps made from sodium-rich glass is approximately the same as for discharge vessels made from the known mixed alkali glass.

The glass composition preferably includes the following constituents:
70-75 wt.% SiO_2 , 15-18 wt.% Na_2O , and 0.25-2 wt.% K_2O . The composition of such a sodium-rich glass is similar to that of ordinary window glass and it is comparatively cheap
20 with respect to the glass used in the known discharge lamp. The cost price of the raw materials for the sodium-rich glass as used in the discharge lamp in accordance with the invention is only approximately 50% of the cost price of the raw materials for the mixed alkali glass as used in the known discharge lamp. Moreover, the conductance of said sodium-rich glass is comparatively low; at 250°C the conductance is approximately $\log \rho = 6.3$ while
25 the corresponding value of the mixed alkali glass is approximately $\log \rho = 8.9$.

A further preferred embodiment of the low-pressure mercury vapor discharge lamp according to the invention is characterized in that a side of the protective layer facing the discharge space is provided with a luminescent layer of a luminescent material. An advantage of the use in low-pressure mercury vapor discharge lamps of a protective layer
30 according to the invention is that the luminescent layer comprising a luminescent material (for example, a fluorescence powder) has an at least comparable adhesion with such a protective layer than with a protective layer of the known low-pressure mercury vapor discharge lamp. In an alternative embodiment the fluorescent layer is provided in between the protective layer according to the invention and the wall of the discharge vessel. In a

particularly preferred embodiment of the low-pressure mercury vapor discharge lamp a protective layer is provided between the inner wall of the discharge vessel and the luminescent layer as well as on top of the luminescent layer, said additional protective layer facing the discharge space.

5 The measure according to the invention is suitable for compact fluorescent lamps having arc-shaped lamp parts, wherein the discharge vessel is additionally surrounded by a light-transmitting envelope. The temperature of the discharge vessel of such "covered" compact fluorescent lamps is comparatively high because the heat dissipation to the environment is reduced by the presence of the outer envelope. This unfavorable temperature
10 balance adversely affects the maintenance of the known discharge lamp due to an increased level of blackening. In experiments it has surprisingly been found that the maintenance of a compact fluorescent lamp provided with a low-pressure mercury vapor discharge lamp according to the invention, the discharge vessel of which is surrounded by an envelope, has 90% maintenance after 12,000 burning hours, while the maintenance of an identical compact
15 fluorescent lamp provided with the known low-pressure mercury vapor discharge lamp, the discharge vessel of which is surrounded by an envelope, is less than 80% after 12,000 burning hours and fluctuates (depending on the amount of Hg consumption consumed). The depletion of mercury out of the amalgam can be so high that the amalgam does no longer give the optimum mercury pressure. In addition, the light output drops significantly.

20 These and other aspects of the invention are apparent from and will be elucidated with reference to the embodiments described hereinafter.

In the drawings:

25 Fig. 1 is a side view, partly broken away, of an embodiment of a low-pressure mercury vapor discharge lamp according to the invention.

30 The Figures are purely diagrammatic and not drawn to scale. Particularly for clarity, some dimensions are exaggerated strongly. Similar components in the Figures are denoted by the same reference numerals as much as possible.

Fig. 1 shows a side view, partly broken away, of an embodiment of a low-pressure mercury discharge lamp with an elongate glass discharge vessel 3. The radiation-transmitting discharge lamp comprises an electrode 5 at each end (only one electrode is

shown in Figure 1), which electrode is formed by a tungsten incandescent coil 6 supported by conducting lead wires 7, 9 which extend through a glass pinch 11 which is provided on a glass stem 10. The incandescent coil 6 is provided with an emitter material such as oxides of barium, calcium, and/or strontium for reducing the work function of the electrode. The stem 10 hermetically seals off the discharge vessel 3. The lead wires 7, 9 are connected to pin-type contacts 13 in the respective end caps 12 which are provided at either end of the discharge lamp. The discharge vessel 3 is filled with a rare gas mixture comprising one or several of the gases xenon, krypton, argon, and neon under a certain filling pressure. The discharge vessel 3 is further provided with a sufficient quantity of mercury.

The glass of the discharge vessel of the low-pressure mercury-vapor discharge lamp, preferably, has a composition comprising silicon dioxide and sodium oxide as important constituents. In the example shown in Figure 1, the discharge vessel 3 is made from so-called sodium-rich glass. Particularly preferred is a glass of the following composition: 70-74 wt.% SiO₂, 16-18 wt.% Na₂O, 0.5-1.3 wt.% K₂O, 4-6 wt.% CaO, 2.5-3.5 wt.% MgO, 1-2 wt.% Al₂O₃, 0-0.6 wt.% Sb₂O₃, 0-0.15 wt.% Fe₂O₃ and 0-0.05 wt.% MnO.

A portion of the surface of the discharge vessel 3 facing the discharge space is being provided with a protective layer 16 comprising yttrium oxide or aluminum oxide and a borate and/or a phosphate of an alkaline earth metal and/or of scandium, yttrium or a further rare earth metal. The protective layer 16 is provided for reducing the absorption of mercury by the glass of the discharge vessel 3. Advantage of using a protective layer comprising a borate and/or a phosphate of scandium, yttrium, lanthanum, cerium and/or gadolinium is that the mercury consumption of low-pressure mercury vapor discharge lamps provided with such a protective layer is considerably lower than with protective layers in the known low-pressure mercury vapor discharge lamps. Preferably, the stem 10 in the discharge vessel is also provided with a protective layer 28.

If the protective layer comprises aluminum oxide, the particles have an effective particle size d_p not exceeding 3 μm , preferably in the range $0.1 \leq d_p \leq 0.8 \mu\text{m}$. In practice, the larger sized particles are obtained from Baikowsky CR6 aluminum oxide powder. A median diameter of 0.47 μm was measured with a SHIMADZU SA-CP3 particle size gauge. For this purpose, a suspension containing 10% CR6 by weight was charge-stabilized in an acetic acid solution of 10^{-2} molarity in that it was vibrated ultrasonically for five minutes in a Branson 1200 type ultrasonic cleaner. The specific area of CR6 is approximately 6 m²/g. The smaller particles are derived from Alon-C manufactured by

Degussa with a median diameter of approximately 0.013 μm and a specific surface of approximately 100 m^2/g .

In addition, a luminescent layer 17, preferably a halophosphate layer, is provided on top of said protective layer 16. In another embodiment, the luminescent material comprises a mixture of green-luminescing, terbium-activated cerium magnesium aluminate, blue-luminescing barium magnesium aluminate activated by bivalent europium, and red-luminescing yttrium oxide activated by trivalent europium. Preferably, the luminescent layer 17 is provided with an additional protective layer 18, said additional protective layer 18 facing the discharge space.

In an embodiment of the low-pressure mercury vapor discharge lamp, various concentrations of a strontium acetate, an yttrium acetate solution and boric acid are added to solutions comprising various concentrations of Al_2O_3 (aluminum oxide) to manufacture the protective layer 16, 18, 28 according to the invention. In an alternative embodiment, a barium acetate solution is added instead of an strontium acetate solution. Table I shows the results of maintenance tests for typical T5 lamps.

Table I Maintenance of discharge lamps (T5 28 W) with known protective layer and with a protective layer according to the invention.

	$\text{Y}(\text{Ac})_3$	Al_2O_3 % by weight	$\text{Sr}(\text{Ac})_2$ (mol)	H_3BO_3 (mol)	Lumens /Watt 100 hrs	100 hrs (%)	2000 hrs (%)
1	—	—	—	—	108	100	91.6
2	5	3	0.048	0.19	104	100	>96
3	—	3.75	0.028	0.11	102	100	94.2

Table I shows that the maintenance of low-pressure mercury vapor discharge lamps provided with a protective layer according to the invention is improved with respect to the known discharge lamp provided with the known aluminum oxide protective layer. Comparable tests, in which $\text{Ba}(\text{Ac})_2$ instead of $\text{Sr}(\text{Ac})_2$ was used as a precursor for the protective layer show that the maintenance of these discharge lamps is comparable with that of the known discharge lamp, but the discharge lamps having a Ba addition according to the invention have an improved adhesion of the luminescent layer to the protective layer.

By way of example, the mercury contents (in $\mu\text{g Hg}$) of the known discharge lamp with the known aluminum oxide protective layer were compared to the mercury contents of discharge lamps with a protective layer according to the invention. The measurements were (destructively) measured on six lamps after several thousand operating hours. Values found for the mercury consumption were averaged. After several thousand operating hours, an approximately twice smaller mercury content was found in protective layers according to the invention as compared with the known protective layers. For the T5 28 W as mentioned above, the typical mercury consumption is in the order of $100 \mu\text{g Hg}$ after 1000 hours life. As a comparison, a known TLD (4 feet) has a mercury consumption of 500–1000 $\mu\text{g Hg}$ after 1000 hours life. It is to be noted that the color point of the low-pressure mercury vapor discharge lamp provided with protective layers according to the invention satisfies the customary requirements ($x \approx 0.31$, $y \approx 0.32$). Comparable results are obtained if yttrium oxide instead of aluminum oxide is used as basis for the protective layer.

It will be evident that many variations within the scope of the invention can be conceived by those skilled in the art. The low-pressure mercury vapor discharge lamp with an aluminum oxide protective layer can also be used for reprographic purposes. In that case, the aluminum oxide protective layer functions as a reflective protective layer.

The scope of the invention is not limited to the embodiments. The invention resides in each new characteristic feature and each combination of novel characteristic features. Any reference signs do not limit the scope of the claims. The word “comprising” does not exclude the presence of other elements or steps than those listed in a claim. Use of the word “a” or “an” preceding an element does not exclude the presence of a plurality of such elements.

CLAIMS:

EPO - DG 1

29. 07. 2002

(43)

1. A low-pressure mercury vapor discharge lamp comprising a discharge vessel,
the discharge vessel enclosing, in a gastight manner, a discharge space
provided with a filling of mercury and a rare gas,
the discharge vessel comprising means for maintaining an electric discharge in
5 the discharge space,
a portion of the surface of the discharge vessel facing the discharge space
being provided with a protective layer,
characterized in that
the protective layer comprises aluminum oxide or yttrium oxide and further
10 comprises a borate and/or a phosphate of an alkaline earth metal and/or of scandium, yttrium
or a further rare earth metal.
2. A low-pressure mercury vapor discharge lamp as claimed in claim 1,
characterized in that the alkaline earth metal is calcium, strontium and/or barium.
- 15 3. A low-pressure mercury vapor discharge lamp as claimed in claim 1,
characterized in that the further rare earth metal is lanthanum, cerium and/or gadolinium.
4. A low-pressure mercury vapor discharge lamp as claimed in claim 1, 2 or 3,
20 characterized in that the aluminum oxide comprises particles with an effective particle size d_p
not exceeding 3 μm , preferably in the range $0.1 \leq d_p \leq 0.8 \mu\text{m}$.
5. A low-pressure mercury vapor discharge lamp as claimed in claim 1, 2 or 3,
characterized in that the protective layer comprises an alkaline earth borate, and in that the
25 thickness of the protective layer is in the range from 0.1–50 μm .
6. A low-pressure mercury vapor discharge lamp as claimed in claim 5,
characterized in that the protective layer comprises SrB_4O_7 .

7. A low-pressure mercury vapor discharge lamp as claimed in claim 5, characterized in that the thickness of the protective layer is in the range from 1–20 μm .

8. A low-pressure mercury vapor discharge lamp as claimed in claim 1, 2 or 3, characterized in that the discharge vessel comprises at least one stem, the stem being provided with the protective layer.

9. A low-pressure mercury vapor discharge lamp as claimed in claim 1, 2 or 3, characterized in that the discharge vessel is made from a glass comprising silicon dioxide and sodium oxide, with the glass composition comprising the following essential constituents, given in percentages by weight (wt.%):

60-80 wt.% SiO_2 ,
10-20 wt.% Na_2O .

10. A low-pressure mercury vapor discharge lamp as claimed in claim 9, characterized in that the glass composition includes the following constituents:

70-75 wt.% SiO_2 ,
15-18 wt.% Na_2O ,
0.25-2 wt.% K_2O .

11. A low-pressure mercury vapor discharge lamp as claimed in claim 1, 2, or 3, characterized in that a side of the protective layer facing the discharge space is provided with a luminescent layer of a luminescent material.

12. A low-pressure mercury vapor discharge lamp as claimed in claim 11, characterized in that the luminescent layer is provided with an additional protective layer.

13. A low-pressure mercury vapor discharge lamp as claimed in claim 11, characterized in that the luminescent material comprises a mixture of green-luminescing, terbium-activated cerium magnesium aluminate, blue-luminescing barium magnesium aluminate activated by bivalent europium, and red-luminescing yttrium oxide activated by trivalent europium.

ABSTRACT:

29. 07. 2002

(43)

Low-pressure mercury vapor discharge lamp (1) has a discharge vessel (3), enclosing, in a gastight manner, a discharge space provided with a filling of mercury and a rare gas. The discharge vessel (3) comprises means for maintaining an electric discharge in the discharge space. A portion of the surface (15) of the discharge vessel (3) facing the

5 discharge space is provided with a protective layer (16) comprising yttrium oxide or aluminum oxide and further comprises a borate and/or a phosphate of an alkaline earth metal and/or of scandium, yttrium or a further rare earth metal. Preferably, the alkaline earth metal is calcium, strontium and/or barium. Preferably, the further rare earth metal is lanthanum, cerium and/or gadolinium. The lamp according to the invention has a comparatively low

10 mercury consumption.

Fig. 1

1/1

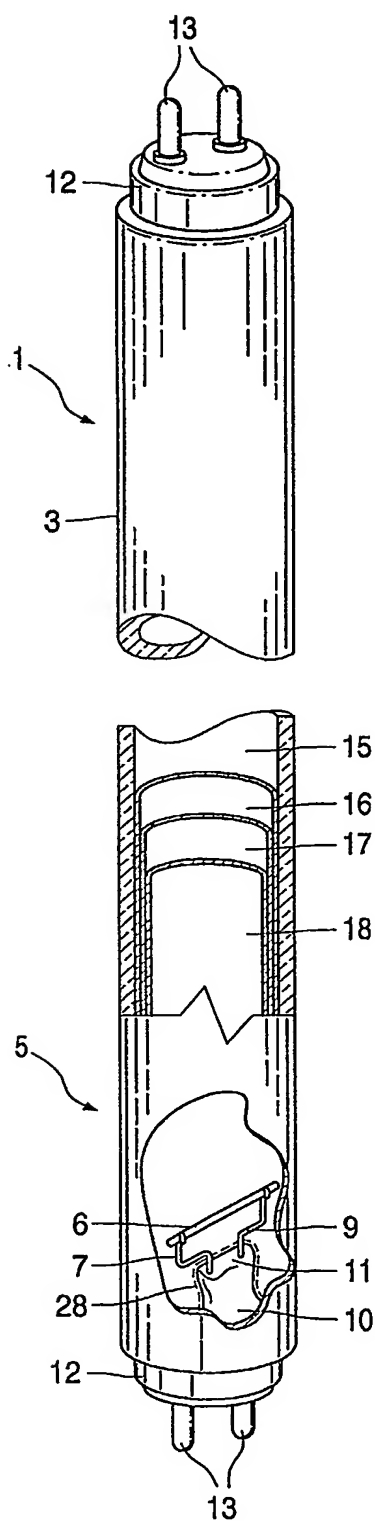


FIG. 1

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☒ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.